# **DNP Photo Imaging America Corp.**

**Software Update Procedure** 

# DS40/DS80 Printer Driver Instructions for Windows 2000/Windows XP

# Acknowledgements

The information contained in this document represents the current view of DNP Photo Imaging America Corp. on the issues discussed as of the date of publication. Because DNP Photo Imaging America Corp. must respond to changing market conditions, it should not be interpreted to be a commitment on the part of DNP Photo Imaging America Corp. DNP Photo Imaging America Corp. cannot guarantee the accuracy of any information presented after the date of publication.

This document is for informational purposes only. DNP Photo Imaging America Corp. MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, AS TO THE INFORMATION IN THIS DOCUMENT.

Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of DNP Photo Imaging America Corp..

DNP Photo Imaging America Corp. may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from DNP Photo Imaging America Corp., the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

DNP Photo Imaging America Corp. • PO Box 767 • San Marcos, TX 78667 • USA

© 2000-2009 DNP Photo Imaging America Corp.. All rights reserved.

#### **Purpose**

This document includes instructions for installing and updating Windows drivers for the DS40/DS80 printers.

## **Printer and Host Computer Connection**

- 1. Connect the DS40/DS80 USB cable to the host computer. Power ON the DS40/DS80 printer.
- 2. If the *Found New Hardware Wizard* is initiated, install the DS40/DS80 using the procedures outlined in the "Found New Hardware Wizard" section of this document.
  - If the Found New Hardware Wizard is NOT initiated, install the DS40/DS80 using the procedures outlined in the "Install from the Add Printer Wizard" section of this document.

## INSTALL USING THE FOUND NEW HARDWARE WIZARD



Note

The following describes the driver installation for the DS40 printer, but instructions are the same for the DS80. Substitute "DS80" for "DS40" when following the instructions.

1. Select "Install from a list or specific location (Advanced)" and click Next.

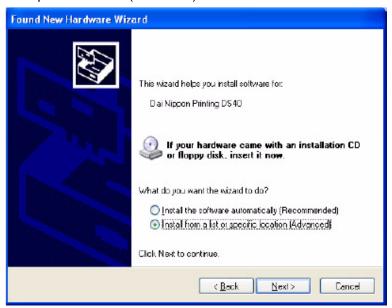


Figure 1. Found New Hardware Wizard



#### Note

When using Windows XP SP2, the following screen (see below) may appear in the *Found New Hardware Wizard*. Select "No, not at this time" and click **Next**.



Figure 2. Can Windows connect to Windows update?

The next screen will ask you to choose search and installation options.
 Select "Search for the best driver in these locations." Check the "Include this location in the search" box.
 Specify the location of the installation disk using the **Browse** button. Click **Next**.

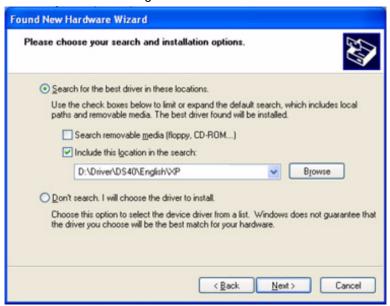


Figure 3. Search and Installation Options

3. After searching for the driver file, the software installation begins.



Figure 4. Searching for Driver File



## Note

The following window (see below) may appear during the installation. Look at the *Version* column and select the newest version. Click **Next**.



Figure 5. Version Number

4. During software installation, the following message will be displayed. Click Continue Anyway to proceed.



Figure 6. Verify Windows Logo



# Note

If "Search removable media (floppy, CD-ROM)" was selected in Figure 3, the following message (see below) will be displayed. Insert the CD-ROM and click **OK**.

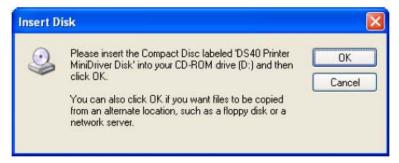


Figure 7. Insert Compact Disc



#### Note

If the following window (see below) appears after clicking **OK** in Figure 7, specify the location of the installation disc using the **Browse** button. Click **OK**.



Figure 8. Specify Location

5. Click **Finish** to complete the wizard.



Figure 9. Finish

6. Go to the *Start* menu and select **Printers and Faxes**. Confirm that the DS40/DS80 printer is shown.



Figure 10. Verify Printer

# INSTALL FROM THE ADD PRINTER WIZARD

1. Go to the Start menu and select Printers and Faxes.



#### Note

Depending on the host computer, Printers and Faxes may not be available from the Start menu. In that case, go to **Start > Control Panel > Printer and Other Hardware > Printers and Faxes**.

2. Click Add Printer.

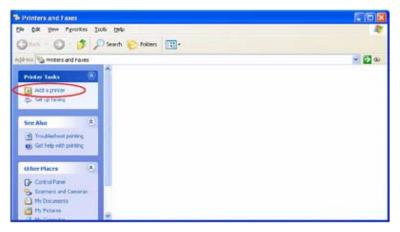


Figure 11. Add Printer

3. When the Add Printer Wizard window opens, click Next.



Figure 12. Add Printer Wizard

4. Select "Local printer attached to this computer", and deselect "Automatically detect and install my Plug and Play printer". Click **Next**.



Figure 13. Local or Network Printer

5. Select "Use the following port" and assign a USB port (USB001 and so on) from the drowdown list. Click Next.



Figure 14. Select a Printer Port

6. Click Have Disk.



Figure 15. Install Printer Software

7. Click the **Browse** button to select the location of the installation disc.

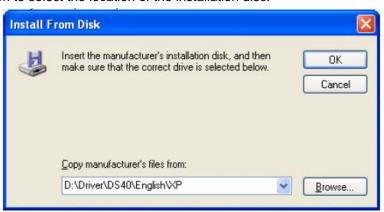


Figure 16. Install from Disc

8. Confirm that DS40 is listed under *Printers*. Click **Next**.



Figure 17. Printers

9. Assign a name to the printer and click Next.



Figure 18. Name Your Printer

10. In the Print Test Page window, select NO. Click Next.



Figure 19. Print Test Page

#### 11. Click Finish.



Figure 20. Finish

#### 12. Restart the system.



#### Note

When installing the software, the following message may appear. Click **Continue Anyway** to proceed.



Figure 21. Windows Logo Test

# **PROPERTIES**

Various printer settings can be changed using the DS40/DS80 Driver properties. As a rule, the printer settings should not be altered. Use the default settings present at installation.

## **Opening Printer Properties**

1. Go to the Start menu and select Printers and Faxes.

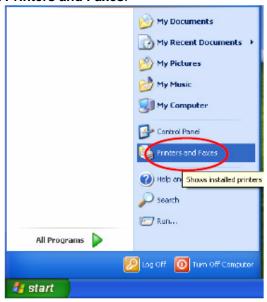


Figure 22. Printers and Faxes

#### **Properties**

2. Select the DS40 printer. Click on **Set printer properties** in the *Printer Tasks* menu.

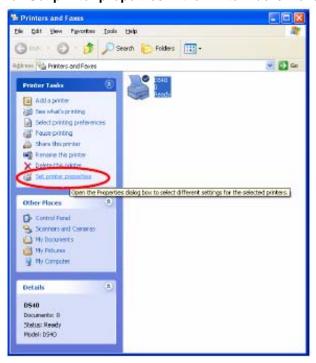


Figure 23. Set Printer Properties

3. The DS40 Properties window will open.

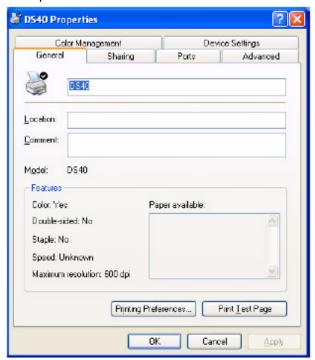


Figure 24. DS40 Properties

# **Explanation of Print Setting Functions**

By selecting **Printing Preferences** from the *Properties* window, you can make changes to various settings.

# Layout Tab

Assign the print orientation as portrait or landscape.

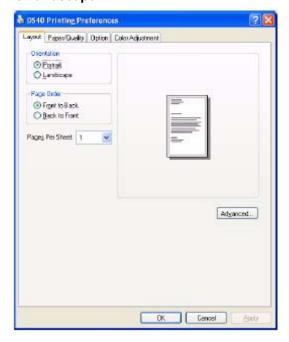



Figure 25. Layout

The original image without rotation is shown to the right.




The image depending on print direction is shown below:

Example – for 4x6, 3.5x5

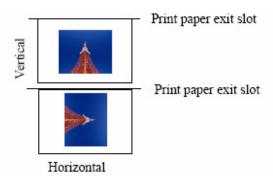


Example - 5x7, 6x8, 6x9

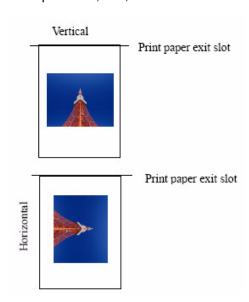

# Page Order

When printing multiple pages, you can set the page order to Front to Back or Back to Front.


Example – Print Order

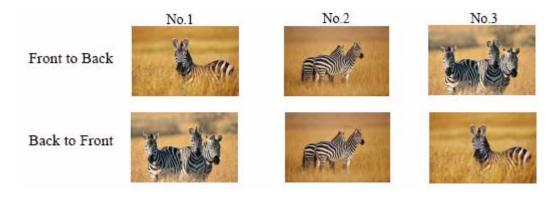

# Pages Per Sheet

This setting will print the designated fractional size.

Example – Fractional Size

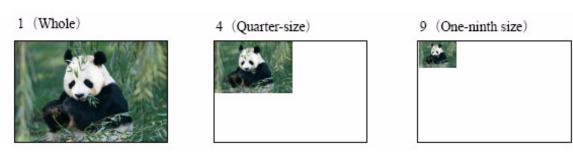

# **Advanced Options**

1. With the Layout tab selected in the Properties window, click the Advanced... button to change advanced settings.

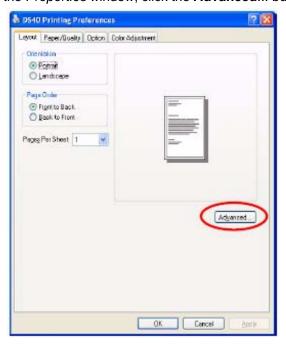


Figure 26. Advanced

2. The Advanced Options window will open.

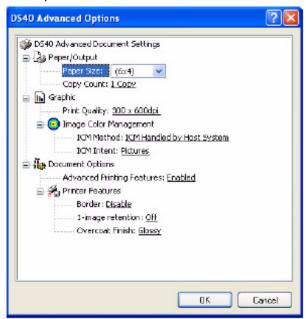


Figure 27. Advanced Properties

## Paper Size

You can designate the default paper size. Please match the paper size to the media size with which the printer is equipped.

Properties Software Update Procedure

# Copy Count

You can designate the number of times an image will print.

# **Print Quality**

You can designate the print quality. Please match the print quality to the printer settings.

#### ICM Method

ICM Method	Function
ICM Disabled	Synchronous with "Color Management: None" in Paper tab.
ICM Handled by Host System	Synchronous with "Color Management: ICM" in <i>Paper</i> tab. Performs color management with the driver.
ICM Handled By Printer	This is the same setting as "ICM Handled by Host System."

#### **ICM** Intent

This designates the rendering method when using ICM. Always have the ICC profile for the DS40 set to "Picture". DO NOT change it to other settings.

#### **Advanced Printing Features**

Always have this set to **Enabled**. DO NOT change it to other settings.

#### Border

This settings is synchronous with the border option in the *Paper* tab.

# 1-image Retention

When the DS40 is printing multiple PC or L-sized images serially, it can retain the previous image within the printer while printing the next image, in order to minimize paper feed. Select **ON** to enable this setting.

#### Overcoat Finish

The overcoat finish for the printed surface can be selected from the following two types:

Overcoat Finish	Function
Glossy	This finishes the print with a glossy surface.
Matte	This finishes the print with a matte (non-glossy) surface.



#### Note

Depending on the version being used, "Glossy" may be the only available option.

# Multiple Layout

When the DS40 is using 6x9 (A5W)/6x8 sized media, or the DS80 is using 8x12/8x10 sized media, two- or three-image layout is possible. The printer driver paper setting makes multi-image layout possible. The image sizes are as follows:

Model	Driver Paper Setting (layout)	Image Size (mm)	Using Media
DS40	(6x4) x 2	(156.1x105.0) x 2	6x9 (A5W), 6x8
DS80	(6x4) x 2	(156.1x105.0) x 2	8x12, 8x10
	(8x4) x2	(207.3x104.6) x 2	8x12, 8x10
	(8x5) x2	(207.3x130.0) x 2	8x12, 8x10
	(8x6) x2	(207.3x155.4) x 2	8x12
	(8x5) _ (8x4)	(207.3x130.0) + (207.3x104.6)	8x12, 8x10
	(8x6) _ (8x4)	(207.3x155.4) + (207.3x104.6)	8x12, 8x10
	(8x6) _ (8x5)	(207.3x155.4) + (207.3x130.0)	8x12
	(8x8) _ (8x4)	(207.3x206.2) + (207.3x104.6)	8x12
	(8x4) x 3	(207.3x104.6) x 3	8x12
Image Layout	Median Size	2.54	

Multiple layout is possible under the following conditions:

- 1. The printer is using 6x9, 6x8, or 8x12, 8x10 sized media.
- 2. The printer driver paper size is set to one of the above sizes.
- 3. Multiple images are sent from the application.




#### Note

Because the multi-image layout occurs on a per-job basis, this works when there are multiple images for one job. If you want to print the same image, be sure to send the image data for each copy to be printed. The printer prints 2 or 3 images in one operation, and the paper is cut as it is fed out.

#### **Properties**

# Multi-image Layout Patterns


The following combinations are possible for the multi-image layout patterns:

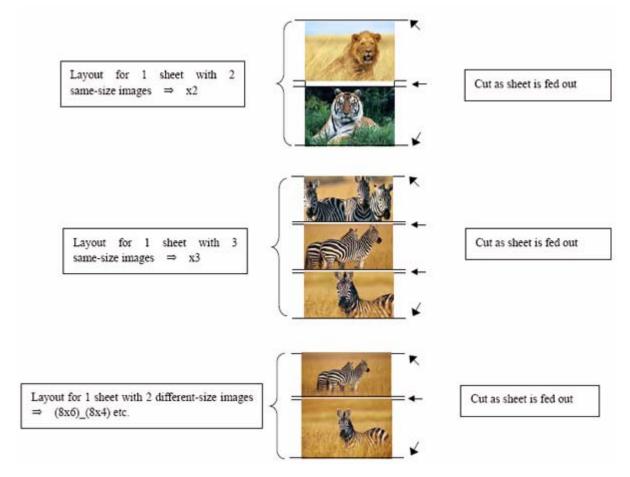

## Cautions for Printing Two Different-size Images on One Sheet

When printing two different-size images on one sheet, 1 inch will be cut off the top and bottom of the second image when the image is generated. When creating the original image, be aware of the following points:

Example – When the layout is set for (8x6)\_(8x4), the driver creates the layout image in the following order:

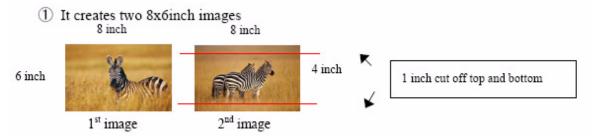


②The driver then lays out the 2 different-size images from ① as one (8x10) image and outputs it to the printer.



Example – When outputting the original image to the driver, the first and second images are created as the same size.

Factor in the space that will be cut off from the second image.

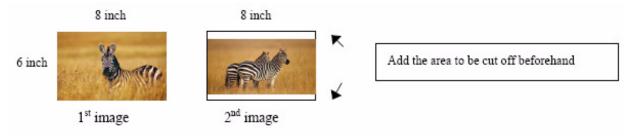

# **Using the Application**

The following is an example of how to use Windows Explorer to print.

1. Select two or more images to print. Go to File > Print.

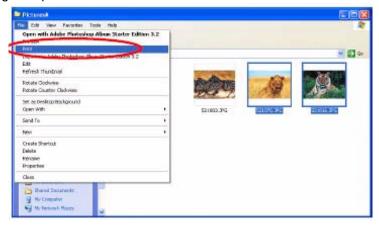


Figure 28. Print

# 2. Click on Next.

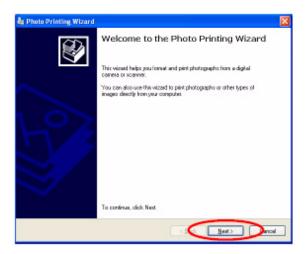


Figure 29. Photo Wizard

3. Click Next.



Figure 30. Select Images

4. After selecting the printer, open "Printing Preferences".

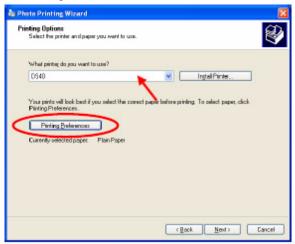


Figure 31. Select Printer

5. In the Printing Preferences window, click Advanced.

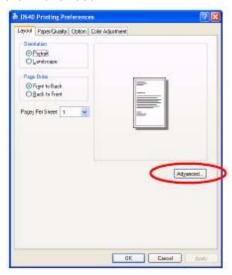


Figure 32. Preferences

6. Set the Paper Size to (6x4) x 2. Then click OK until you return to the window in Step 4, then click Next.

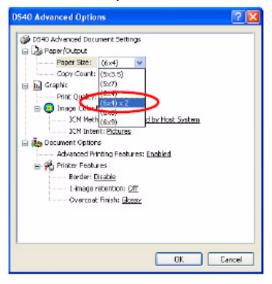


Figure 33. Paper Size

## 7. Click Next.

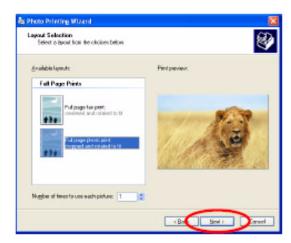


Figure 34. Layout Selection

## 8. Click Finish.



Figure 35. Finish

# Paper/QualityTab

Select Color in the Paper/Quality tab.

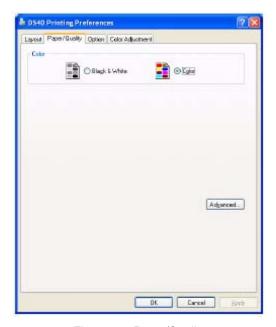


Figure 36. Paper/Quality

# **Options Tab**

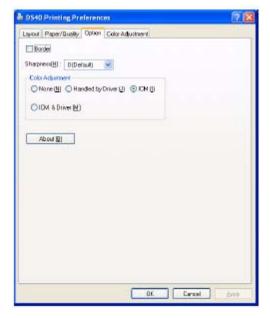


Figure 37. Options

# Border

Check the border box to add border. This setting is synchronous with border setting in *Advanced Settings*.

Properties Software Update Procedure

# Sharpness

Processes for 11 sharpness levels. 0 means there is no sharpness processing. Minus (-) blurs the image and plus (+) increases the sharpness.

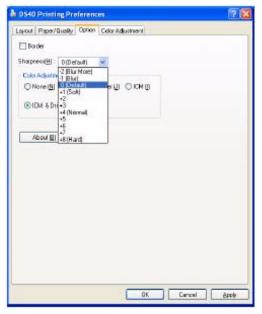


Figure 38. Sharpness

## Color Adjustment

**None** – this item is synchronous with the *ICM Method* in the *Advanced Settings*. Selecting **None** disables ICM and the *Color Adjustment* tab, and color adjustment does not occur from the driver.

**Handled by Driver** – checking this item disables ICM and *Color Adjustment* is enabled. The adjustment values for gamma, brightness, contrast, and chroma are shown.

**ICM** – this item is synchronous with *ICM Handled by Host System* setting in the *Advanced Settings*. Checking this item enables color management from the driver.

ICM & Driver - checking this item enables ICM (color management) and color adjustment

About - displays the driver version

# **Properties**

# Color Adjustment Tab

If you checked **Handled by Driver** under the *Color Adjustment* section of the *Options* tab, the respective color adjustment values are reflected in the image on this tab.

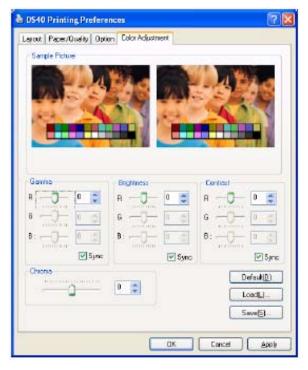


Figure 39. Color Adjustment Tab

## Setting ranges are as follows:

Adjustment Item	Adjustment Value		
Gamma	-100(dark) ~ 100(light) (0 means no adjustment, Gamma 2.0 ~ 0.5		
	Adjusts the density of the highlights in the image. The greater the gamma value, the brighter the highlights.		
	Synchronous check box		
	ON: sets RGB at the same value OFF: sets RGB at a different value		
Brightness	-100(dark) ~ 100(light) (0 means no adjustment)		
	Adjusts the brightness of the image. The larger the value, the greater the overall brightness of the image.		
	Synchronous check box		
	ON: sets RGB at the same value OFF: sets RGB at a different value		
Contrast	-100(weak) ~ 100(strong) (0 means no adjustment)		
	Adjusts the contrast of the image. The larger the value, the greater the contrast.		
	Synchronous check box		
	ON: sets RGB at the same value OFF: sets RGB at a different value		

Properties Software Update Procedure

Adjustment Item	Adjustment Value		
Chroma	-100(weak) ~ 100(strong) (0 means no adjustment)		
	Adjusts the color saturations of the image.		

# **Default Values for Various Settings**

Default values for each option (at the time of installation) are shown below. If the printer driver does not work correctly after changing the options, return to the default settings.

Tab	Options			Default	
Layout	Orientation			Portrait	
	Page Order			Front to Back	
	Pages Per Sheet	1			
Paper/Quality	Color			Color	
	Frame			Disable	
Option	Sharpness			0 (Default)	
	Color Adjustment			ICM	
	Gamma	Samma			
Color	Brightness			0	
Adjustment	Contrast			0	
	Chroma			0	
	Paper/Output	Paper Size		DS40 (6x4) DS80 (8x10)	
		Copy Count		1	
		Print Quantity		300 x 600 dpi	
Advanced (click Advanced on Layout tab)	Graphic	Image Color Management	ICM Method	ICM Handled by Host System	
			ICM Intent	Pictures	
	Document Options	Advanced Prin	ting Features	Enable	
		Printer Features	Border	Disable	
			Dual Image	Off	
			Overcoat Finish	Glossy	

# **Color Management**

The Color Management tab designates the color profile. Default profile at installation is [DS40\_xxxx] where xxxx is a four-digit number that refers to the version.

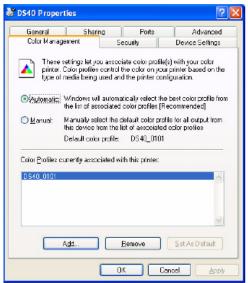


Figure 40. Color Management

# **Print Area**

Depending on the paper size designated at the driver, the image size and dot count will be as follows:

Model	Paper	Size (inch)	Print Area (mm)	300x300 dpi	300x600 dpi
	(3.5x5)	3.5" x 5"	92.1 x 131.1	1088 x 1548	2176 x 1548
DS40/	(4x6)	4" x 6"	105.0 x 156.1	1240 x 1844	2480 x 1844
DS80	(5x7)	5" x 7"	131.1 x 181.0	1548 x 2138	1548 x 4276
	(6x8)	6" x 8"	156.1 x 206.2	1844 x 2436	1844 x 4872
	(6x9)	6" x 9"	156.1 x 232.0	1844 x 2740	1844 x 5480
	(8x4)	8" x 4"	207.3 x 104.6	2448 x 1236	2448 x 2472
	(8x5)	8" x 5"	207.3 x 130.0	2448 x 1536	2448 x 3072
DS80	(8x6)	8" x 6"	207.3 x 155.4	2448 x 1836	2448 x 3672
	(8x8)	8" x 8"	207.3 x 206.0	2448 x 2436	2448 x 4872
	(8x10)	8" x 10"	207.3 x 257.0	2448 x 3036	2448 x 6072
	A4 Length	8" x 11.7"	207.3 x 297.0	2448 x 3544	2448 x 7088
	(8x12)	8" x 12"	207.3 x 307.8	2448 x 3636	2448 x 7272

With the DS80 printer, the paper size (output size) can be designated as less then 8 inches, but the media used will be the DS80 8-in. width media.

Updating the Driver

# UPDATING THE DRIVER

In order to update the printer driver, follow the instructions below:



#### Note

Updating the driver is the same for both the DS40 and DS80 printers. The following instructions are for the DS40, but if you are using a DS80, just read "DS40" as "DS80".

#### **Driver Removal**

Before removing the printer driver, shut down all other applications.
 Double-click the icon for the printer to be removed, and make sure there are no documents in the queue before you begin removal of the driver.

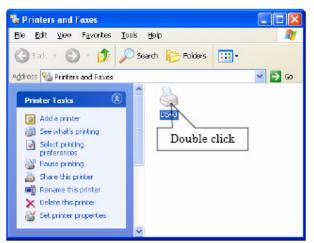




Figure 41. Printers & Printer Queue

2. From the *Printers and Faxes* window, select the DS40 printer. From the *File* menu, select **Delete**. You will be asked if you are sure you want to delete the printer. Select **Yes**.

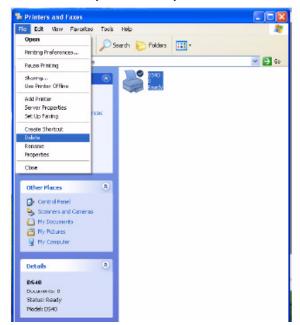




Figure 42. Delete Printer

Updating the Driver Software Update Procedure

After the DS40 printer has been removed, go to the *File* menu and select **Server Properties**.
 The *Print Server Properties* dialog box appears. Select the *Drivers* tab.
 Select the DS40 driver and click **Remove**. A confirmation box will appear. Click **Yes**.

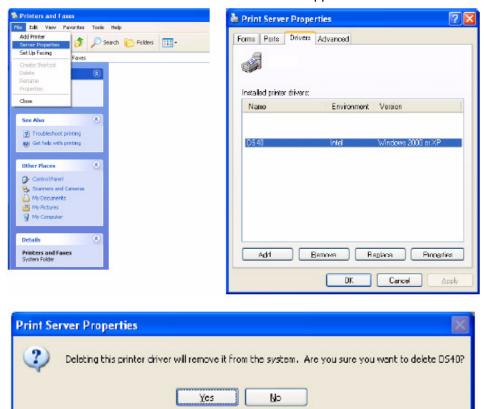


Figure 43. Removing Driver



Before removing the printer driver, if the following error message (see below) appears, reboot the computer. After the computer has rebooted, repeat the steps to remove the printer driver.



Figure 44. Error Occurred

#### **Installing the Printer Driver Upgrade**

After removing the printer and printer driver, follow the instructions at the beginning of this document for installing the new printer driver.

#### **Rebooting the Computer**

After installation of the printer driver is complete, be sure to reboot the computer. (Do not print immediately after installation. First, reboot the computer.)

Updating the Driver

Software Update Procedure

Updating the Driver

Software Update Procedure